

(12) PATENT APPLICATION
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 200223229 A1

(54) Title
Building panel

(51)⁷ International Patent Classification(s)
E04B 002/72

(21) Application No: **200223229**

(22) Application Date: **2002.03.12**

(30) Priority Data

(31) Number	(32) Date	(33) Country
PR4959	2001.05.11	AU

(43) Publication Date : **2002.11.14**

(43) Publication Journal Date : **2002.11.14**

(71) Applicant(s)
CSR Limited

(72) Inventor(s)
David John Carne

(74) Agent/Attorney
SPRUSON and FERGUSON,GPO Box 3898,SYDNEY NSW 2001

BUILDING PANEL

Abstract

A wall 10 to extend between a floor 11 and ceiling 12. The wall 10 includes a metal sheet member 15 that is corrugated so as to have longitudinally extending ridges 16. The ridges 16 extend from a major surface of the sheet member 15, which major surface is provided with flat portions 17. Secured to the flat portion 17 by means of fasteners 18 or adhesive is a planar sheet member 19 which in its preferred form is a sheet of plasterboard.

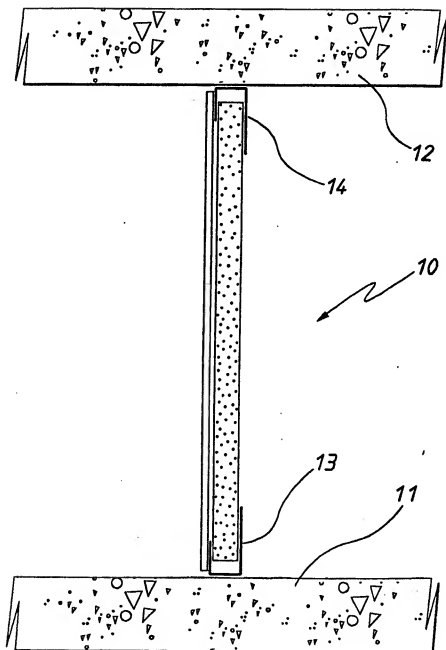


FIG. 1

AUSTRALIA

PATENTS ACT 1990

COMPLETE SPECIFICATION

FOR A STANDARD PATENT

ORIGINAL

Name and Address
of Applicant :

CSR Limited
Level 1, 9 Help Street
Chatswood New South Wales 2067
Australia

Actual Inventor(s):

David John Carne

Address for Service:

Spruson & Ferguson
St Martins Tower, Level 35
31 Market Street
Sydney NSW 2000
(CCN 3710000177)

Invention Title:

Building Panel


ASSOCIATED PROVISIONAL APPLICATION DETAILS

[33] Country
AU

[31] Applic. No(s)
PR4959

[32] Application Date
11 May 2001

The following statement is a full description of this invention, including the best method of performing it known to me/us:-



BUILDING PANEL

Technical Field

The present invention relates to building panels and more particularly to panels used
5 to form walls of buildings.

Background of the Invention

Typically external and more particularly internal walls are supported by a frame
consisting of a top and bottom plate between which stud members pass. Sheet material
10 such as plasterboard is then secured to the frame so as to be supported thereby. In
particular, each plasterboard sheet would be supported by a plurality of the stud members
as well as the top and bottom plate.

The above typical wall structure has the disadvantage that it is reasonably low
security. It is relatively easy for an intruder to destroy part of the plasterboard in order to
15 provide a passage. This is of particular prominence when such walls are used to separate
adjacent premises or hotel rooms.

Object of the Invention

It is the object of the present invention to overcome or substantially ameliorate the
20 above disadvantages.

Summary of the Invention

There is disclosed herein a building panel for a wall, said panel including;
a metal sheet having opposite major surfaces and to be generally vertically oriented
25 so as to have a top and a bottom edge and generally vertically extending side edges, a
plurality of ridges extending generally vertically and parallel to the side edges but
transversely spaced, said ridges extending from one of said major surfaces; and
a generally planar sheet member extending from the other major surface.
Preferably the metal sheet is corrugated so as to provide said ridges.
30 Preferably said corrugations have planar portions providing said major surfaces.
Preferably said planar sheet member is plasterboard.

Preferably said building panel is incorporated in a wall in which the building panel
is supported adjacent its periphery only.

Brief Description of the Drawings

A preferred form of the present invention will now be described by way of example with reference to the accompanying drawings wherein:

Figure 1 is a schematic section side elevation of an internal building wall;

Figure 2 is a schematic top plan view of a portion of the wall of Figure 1;

Figure 3 is a schematic top plan view of a modification of the wall of Figure 1; and

Figure 4 is a further schematic top plan view of a modification of the wall of Figure 1.

Detailed Description of the Preferred Embodiments

In the accompanying drawings there is schematically depicted a wall 10 which would be typically an internal dividing wall of a building. The wall 10 extends between a floor 11 and ceiling 12. Attached to the floor 11 is a bottom plate 13 while attached to the ceiling 12 is a top plate 14.

The wall 10 includes a metal sheet member 15 that in this instance is corrugated so as to have longitudinally extending ridges 16. The ridges 16 extend from a major surface of the sheet member 15, which major surface is provided with flat portions 17.

Secured to the flat portions 17 by means of fasteners 18 or adhesive is a planar sheet member 19 which in this preferred embodiment is a sheet of plasterboard.

The sheet member 15 and plasterboard 19 form a building panel 20 which is supported adjacent its periphery only by means of vertically extending studs adjacent the vertical edges, and by the top and bottom plates 13 and 14. That is there are no stud members located between the vertically extending edges of the building panel 20.

In the embodiment of Figure 3 the wall 10 has two sheet members 15 and two plasterboard sheets 19 and further incorporates an insulation layer 21.

In the embodiment of Figure 4 there is no insulation layer 21.

In the above-described preferred embodiments the building panel 20 provides a number of advantages:

1. increased security in that the metal sheet member 15 inhibits penetration;
2. increased fire protection;
3. increased strength; and
4. elimination of studs intermediate to the edges of the building panel.

Typically the above-mentioned building panel 20 would be delivered to a building site with a plurality of the sheet members 19 secured in a stack and the metal members 15

secured in a separate stack. This ideally minimises the volume of material being transported. The panel 20 would be assembled on site.

8
8
8
8

2
2

2
2

4
4

The claims defining the invention are as follows:

1. A building panel for a wall, said panel including:
a metal sheet having opposite major surfaces and to be generally vertically oriented
so as to have a top and a bottom edge and generally vertically extending side edges, a
5 plurality of ridges extending generally vertically and parallel to the side edges but
transversely spaced, said ridges extending from one of said major surfaces; and
a generally planar sheet member extending from the other major surface.
2. The panel of claim 1 wherein the metal sheet is corrugated so as to provide
said ridges.
- 10 3. The panel of claim 2 wherein said corrugations have planar portions providing
said major surfaces.
4. The panel of claims 1, 2 or 3 wherein said planar sheet member is
plasterboard.
5. A wall incorporating the building panel of any one of claim 1 to 4 wherein
15 said building panel is supported adjacent its periphery only.
6. A building panel substantially as hereinbefore described with reference to the
accompanying drawings.
7. A wall substantially as hereinbefore described with reference to the
accompanying drawings.

20

Dated 27 February, 2002

CSR Limited

Patent Attorneys for the Applicant/Nominated Person

SPRUSON & FERGUSON

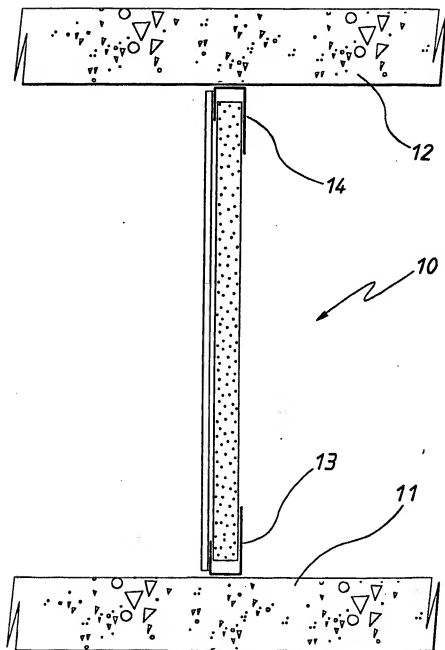


FIG. 1

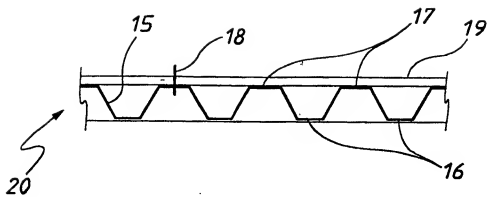


FIG. 2

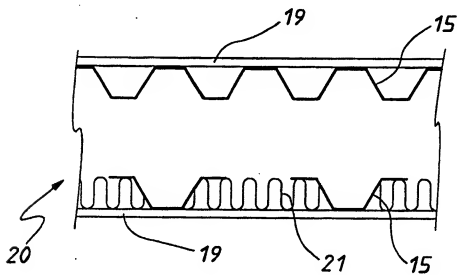


FIG. 3

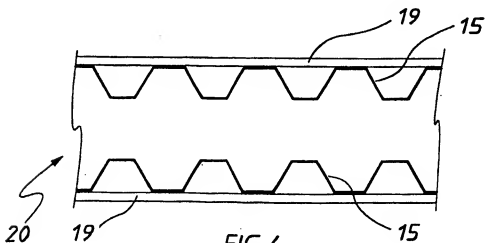


FIG. 4